

CONTACT CLEANER – Kontakt 60



Oxides don't stand a chance.


An oxide dissolving contact cleaner, highly recommended to regenerate corroded, heavily used and soiled contacts. Low contact resistance is restored, thus guaranteeing low voltage drop at even lowest contact pressures.

Application

- Ensures clean results wherever electrical contacts need to be cleaned
- Removes oxides from all kinds of metal contacts in electronics, automotive and industrial applications. Commonly used on: Switches, Plug and socket connectors, Sockets of integrated circuits, Fuses, Lamp sockets, Slide contacts

How to use

- Identify vulnerable areas on equipment.
- Power off and disconnect equipment.
- Shake the lubricant container.
- Apply directly to vulnerable areas.
- Allow it to form a protective barrier.

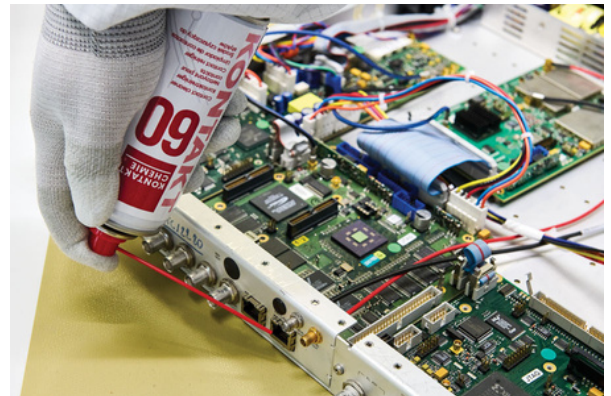

Part #: 28200158

Key Features

Dissolves oxides on contacts,

Metals, graphite, carbon-based materials, thermoplastics, thermoset resins, insulators and other materials are not affected.

A dielectric substance, which does not facilitate leakage currents.

Product Data

Aerosol

- Flash point (ASTM D 56)
- Density at 20°C FEA 605
- Colour

< 0 °C
0,774 g/cm³
Red transparent

Properties after drying off solvent

- Colour
- Flash point ASTM D 56)
- Density at 20°C ASTM D891
- Temperature Range
- Thinning Ratio

Red transparent
Circa 200 °C
0,83 g/cm³
up to 80 °C
1 Volume Part / 7 Volume Parts
Kontakt 60 Concentrate /
Kontakt WL